


UC-249-Revoke TherLink-HC Prof pharmacy-Ref- eID reading PIN code-Low priority

Used Documentation

Cookbook	Version	Location
Therapeutic Link WS Cookbook	1.6	https://www.ehealth.fgov.be/ehealthplatform/nl/service-ehealth-therapeutic-links

General Information

Therapeutic Links

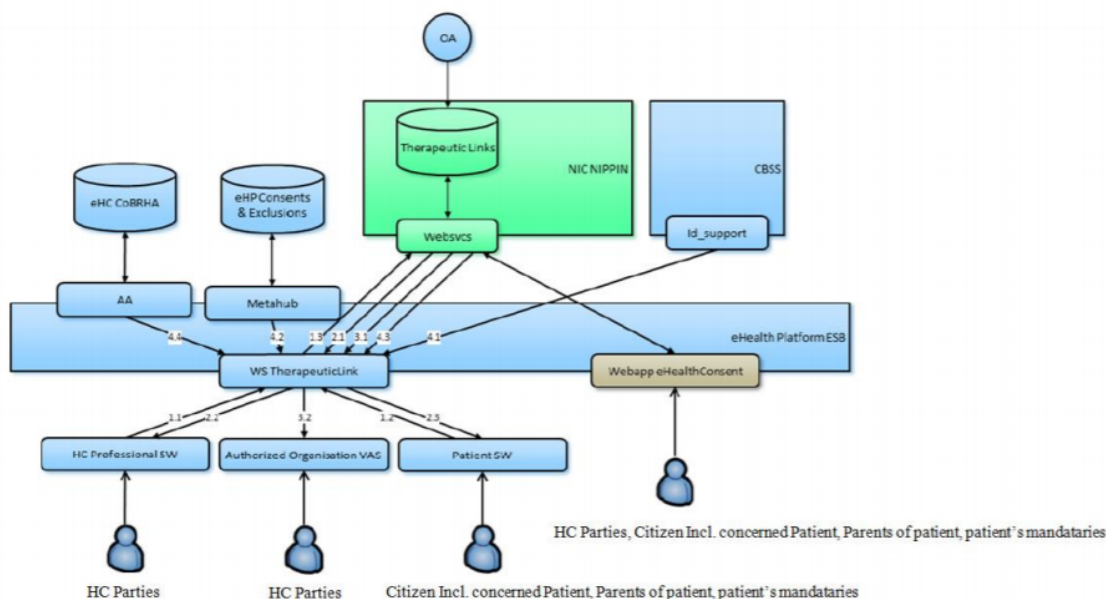

Management of the Therapeutic Links:

- The eHealth consent WA will allow both patients (incl. patient's parents or mandataries) and authorized HC parties to manage the therapeutic links (declaration, revocation and consultation)
- The authorized HC parties, citizen (incl. concerned patients, parents of patients or patient's mandataries) are also able to perform the same operations throughout their usual software by calling the eHealth therapeutic link WS.
- The authorized HC organizations are only authorized to verify the existence of the therapeutic links before allowing the HC parties to access the medical data of the patients by calling the therapeutic link consultation WS through their application.

The existence of a therapeutic relation is one of the fundamental prerequisites for the healthcare (HC) providers to access a patient's medical data. Therefore, the eHealth platform makes available to the actors involved in the exchange, storage or referencing personal data, a relay service to manage those therapeutic relations and associated means of evidence.

This relay service is obviously limited to kinds of therapeutic links made available at the eHealth platform level by the 'owner' of this therapeutic link (such as the HC party declaring a therapeutic link or the actor responsible of a recognized specific database, e.g. for Global Medical File relation). A therapeutic link is a relation between a patient and a HC party for a certain type of therapeutic relation over a period of validity depending on the given evidence. It is not possible to update an existing the therapeutic link; to update information you first need to revoke the existing therapeutic link.

However, the period of validity of an active therapeutic link could be extended on the condition that

- The start date of the new period is greater or equal to the start date of the period to be extended
- The end date of the new period is greater than the end date of the period to be extended (overlap of period of validity)

The following operations (request-response operation type) will support the management of these links:

PutTherapeuticLink	Used to declare the therapeutic links. Its main purpose is to allow one to declare a therapeutic link.
RevokeTherapeuticLink	Used to revoke the therapeutic links. Its main purpose is to allow one to “end” the (declaration of a) therapeutic link.
GetTherapeuticLink	Used to consult therapeutic links according to basic search parameters. Its main purpose is to allow one to check the existence of the therapeutic links when executing a consultation process
HasTherapeuticLink	Used to check the existence of a therapeutic link

The therapeutic links are managed according to the rules corresponding to the type of therapeutic link through:

- Specific webservices (WS) by HC professionals as end-users through their usual software or through an authorized organization
- A dedicated web application (WA), currently called eHealth Consent with following end-users: Patients and HC professionals/ HC professionals within an organization

	Declare/Put	Revoke	Consult (Get)	Has
Citizen (patient, parent, mandatory)	Yes	Yes	Yes	Yes
Authorized HC Parties (HC professionals)	Yes	Yes	Yes	Yes
Authorized HC organizations	No	No	Yes	Yes

KMEHR

This service is a 'KMEHR-based' WS. We thus strongly recommend consulting the documentation related to the KMEHR normative elements. The KMEHR site aims to offer a central point for the documentation of the KMEHR normative elements.

<https://www.ehealth.fgov.be/standards/kmehr/en>

The three following generic elements are, in particular, essentials to build the request and the reply of the therapeutic link WS.

- **cd** : This is the key element used to code information: this section is completely based on the description from the KMEHR standard, as can be found on: <https://www.ehealth.fgov.be/standards/kmehr/en/page/key-elements#cd>
- **id**: This element is used to uniquely identify key elements like request, response of the WS, patient, HCParty. It can also be used to specify any unique identifier: this section is completely based on the description from the KMEHR standard, as can be found on: <https://www.ehealth.fgov.be/standards/kmehr/en/page/key-elements#id>
- **HC Party**: The hcparty element is a generic element that aims to represent any kind of healthcare party: organization, physician, medical specialty, or even IT systems: this section is entirely based on the description from the KMEHR standard, as can be found on: <https://www.ehealth.fgov.be/standards/kmehr/en/page/hcparty>


Basic Flow

Flow	Specifications				
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-249-BF</td></tr> <tr> <td>Name</td><td>Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral</td></tr> </table>	ID	UC-249-BF	Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral
ID	UC-249-BF				
Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral				

Des cript ion	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy</p>
Acto r(s)	<ul style="list-style-type: none"> • HC Professional within a pharmacy
Req uire men ts	<ul style="list-style-type: none"> • End-user is a HC professional within a pharmacy • End-user manages the therapeutic links throughout his usual software • Valid eHealth Certificate of the pharmacy • e-ID card of concerned patient • HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link • Identification HC professional <p>°Identifier pharmacy: NIHI, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHI (if available), HC party category</p> <ul style="list-style-type: none"> • Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHI (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> • Type of therapeutic link: referral • Inclusive start date: optional • Exclusive end date: optional • Comment to justify the declaration (optional) • Type of proof: e-ID reading with pincode
Trig ger	The user wants to revoke a therapeutic link
Pre con ditio n(s)	<ul style="list-style-type: none"> • The user has an account for the application • The user is logged out
Flow	<ol style="list-style-type: none"> 1. The user attempts to access the eHealth WS Therapeutic Link 2. The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> 3. A request for a SAML Token is sent to the Secure Token Service (STS) 4. The STS responds with a SAML Token 5. The user has access to the eHealth WS Therapeutic Link 6. The user does a request for Revoke Therapeutic Link 7. The Revoke Therapeutic Link Request is sent to the WS Therapeutic Link 8. The given therapeutic link, if found, is revoked in the eHealth Database & All overlapped period of validity of the same relation are revoked 9. The request is logged 10. The WS Consent responds with a Revoke Therapeutic Link Response
Post con ditio n(s)	<ul style="list-style-type: none"> • The given therapeutic link, if found, is revoked in the eHealth Database • All overlapped period of validity of the same relation are revoked
Test Data	<ul style="list-style-type: none"> • Example Revoke Therapeutic Link Request • Example Revoke Therapeutic Link Response • Example Revoke Therapeutic Link Response - Unsuccessful

	End point(s)	Therapeutic Links Database
	Remarks	<ul style="list-style-type: none"> Start date: If provided then the start date must be equal to the start date of the active relation else the request is rejected (not found) else (not provided) then the revocation is applied on any active therapeutic relation corresponding to the input criteria i.e. patient, hcparty, therapeutic relation type End date: (must be interpreted as 'revocation date' and not the end date of the relation)
	Additional Information	<ul style="list-style-type: none"> If the support card number is provided, then they must be valid and compliant For the overlapped relations, the start date of the new period must be greater or equal to the start date of the period to be extended and the end-date of the new period must be greater than the end-date of the period to be extended


Alternative Flow

Flow	Specifications								
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-249-AF</td></tr> <tr> <td>Name</td><td>Revoke Therapeutic Link - HC Professional within a pharmacy (Pharmacist isn't pharmacy holder) – e-ID - Referral</td></tr> <tr> <td>Description</td><td> <p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy, who isn't the pharmacy holder, acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy.</p> </td></tr> <tr> <td>Actor(s)</td><td> <ul style="list-style-type: none"> HC Professional within a pharmacy who isn't the pharmacy holder </td></tr> </table>	ID	UC-249-AF	Name	Revoke Therapeutic Link - HC Professional within a pharmacy (Pharmacist isn't pharmacy holder) – e-ID - Referral	Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy, who isn't the pharmacy holder, acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy.</p>	Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy who isn't the pharmacy holder
ID	UC-249-AF								
Name	Revoke Therapeutic Link - HC Professional within a pharmacy (Pharmacist isn't pharmacy holder) – e-ID - Referral								
Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy, who isn't the pharmacy holder, acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy.</p>								
Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy who isn't the pharmacy holder 								

Requirements	<ul style="list-style-type: none"> End-user is a HC professional within a pharmacy who isn't the pharmacy holder End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link <ul style="list-style-type: none"> Identification HC professional <ul style="list-style-type: none"> °Identifier pharmacy: NIHI, HC party category °Identifier pharmacy holder: SSIN, NIHI (if available), HC party category °Identification end-user: SSIN, NIHI (if available), HC party category Information therapeutic link <ul style="list-style-type: none"> °Identification concerned patient: SSIN, support card number (optional), first and family name (optional) °Identification concerned HC party: NIHI (8digits), HC party category, name of the organization (optional) Type of therapeutic link: referral Inclusive start date: optional Exclusive end date: optional Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode
Trigger	The user wants to revoke a therapeutic link
Pre condition(s)	<ul style="list-style-type: none"> The user has an account for the application The user is logged out
Flow	<ol style="list-style-type: none"> The user attempts to access the eHealth WS Therapeutic Link The user needs to request a SAML Token by using its <i>personal eHealth Certificate</i> A request for a SAML Token is sent to the Secure Token Service (STS) The STS responds with a SAML Token The user has access to the eHealth WS Therapeutic Link The user does a request for Revoke Therapeutic Link The Revoke Therapeutic Link Request is sent to the WS Therapeutic Link The given therapeutic link, if found, is revoked in the eHealth Database & All overlapped period of validity of the same relation are revoked The request is logged The WS Consent responds with a Revoke Therapeutic Link Response
Post Condition(s)	<ul style="list-style-type: none"> The given therapeutic link, if found, is revoked in the eHealth Database All overlapped period of validity of the same relation are revoked
Test Data	<ul style="list-style-type: none"> Example Revoke Therapeutic Link Request Example Revoke Therapeutic Link Response Example Revoke Therapeutic Link Response - Unsuccessful
End point(s)	Therapeutic Links Database


Remarks	<ul style="list-style-type: none"> Start date: If provided then the start date must be equal to the start date of the active relation else the request is rejected (not found) else (not provided) then the revocation is applied on any active therapeutic relation corresponding to the input criteria i.e. patient, hcparty, therapeutic relation type End date: (must be interpreted as 'revocation date' and not the end date of the relation)
Additional Information	<ul style="list-style-type: none"> If the support card number is provided, then they must be valid and compliant For the overlapped relations, the start date of the new period must be greater or equal to the start date of the period to be extended and the end-date of the new period must be greater than the end-date of the period to be extended

Exception Flow 1

Flow	Specifications										
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-249-EF01</td></tr> <tr> <td>Name</td><td>Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - HC party performing the revocation is excluded by the concerned patient</td></tr> <tr> <td>Description</td><td> <p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. HC party performing the revocation is excluded by the concerned patient</p> </td></tr> <tr> <td>Actor(s)</td><td>HC Professional within a pharmacy (HC party performing the revocation is excluded by the concerned patient)</td></tr> <tr> <td>Requirements</td><td> <ul style="list-style-type: none"> End-user is a HC professional within a pharmacy (HC party performing the revocation is excluded by the concerned patient) End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link Identification HC professional <p>°Identifier pharmacy: NIHII, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: referral Inclusive start date: optional Exclusive end date: optional Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode </td></tr> </table>	ID	UC-249-EF01	Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - HC party performing the revocation is excluded by the concerned patient	Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. HC party performing the revocation is excluded by the concerned patient</p>	Actor(s)	HC Professional within a pharmacy (HC party performing the revocation is excluded by the concerned patient)	Requirements	<ul style="list-style-type: none"> End-user is a HC professional within a pharmacy (HC party performing the revocation is excluded by the concerned patient) End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link Identification HC professional <p>°Identifier pharmacy: NIHII, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: referral Inclusive start date: optional Exclusive end date: optional Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode
ID	UC-249-EF01										
Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - HC party performing the revocation is excluded by the concerned patient										
Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. HC party performing the revocation is excluded by the concerned patient</p>										
Actor(s)	HC Professional within a pharmacy (HC party performing the revocation is excluded by the concerned patient)										
Requirements	<ul style="list-style-type: none"> End-user is a HC professional within a pharmacy (HC party performing the revocation is excluded by the concerned patient) End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link Identification HC professional <p>°Identifier pharmacy: NIHII, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: referral Inclusive start date: optional Exclusive end date: optional Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode 										

Trigger	The user wants to revoke a therapeutic link
Precondition(s)	<ul style="list-style-type: none"> The user has an account for the application The user is logged out
Flow	<ol style="list-style-type: none"> The user attempts to access the eHealth WS Therapeutic Link The user needs to request a SAML Token by using its <i>personal eHealth Certificate</i> A request for a SAML Token is sent to the Secure Token Service (STS) The STS responds with a SAML Token The user has access to the eHealth WS Therapeutic Link The user does a request for Revoke Therapeutic Link The Revoke Therapeutic Link Request is sent to the WS Therapeutic Link The WS Consent responds with a Revoke Therapeutic Link Response: error message
Post Condition(s)	Error message
Test Data	<ul style="list-style-type: none"> Example Revoke Therapeutic Link Request Example Revoke Therapeutic Link Response Example Revoke Therapeutic Link Response - Unsuccessful
Endpoint(s)	Therapeutic Links Database


Exception Flow 2

Flow	Specifications								
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-249-EF02</td></tr> <tr> <td>Name</td><td>Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - Active therapeutic link does not exist between the HC party performing the revocation and the concerned patient</td></tr> <tr> <td>Description</td><td> <p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. Active therapeutic link does not exist between the HC party performing the revocation and the concerned patient</p> </td></tr> <tr> <td>Actor(s)</td><td> <ul style="list-style-type: none"> HC Professional within a pharmacy </td></tr> </table>	ID	UC-249-EF02	Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - Active therapeutic link does not exist between the HC party performing the revocation and the concerned patient	Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. Active therapeutic link does not exist between the HC party performing the revocation and the concerned patient</p>	Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy
ID	UC-249-EF02								
Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - Active therapeutic link does not exist between the HC party performing the revocation and the concerned patient								
Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. Active therapeutic link does not exist between the HC party performing the revocation and the concerned patient</p>								
Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy 								

Requirements	<ul style="list-style-type: none"> • End-user is a HC professional within a pharmacy • End-user manages the therapeutic links throughout his usual software • Valid eHealth Certificate of the pharmacy • e-ID card of concerned patient • HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link • Identification HC professional <p>°Identifier pharmacy: NIHII, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> • Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> • Type of therapeutic link: referral • Inclusive start date: optional • Exclusive end date: optional • Comment to justify the declaration (optional) • Type of proof: e-ID reading with pincode • Active therapeutic link does not exist between the HC party performing the revocation and the concerned patient
Trigger	The user wants to revoke a therapeutic link
Preconditions	<ul style="list-style-type: none"> • The user has an account for the application • The user is logged out
Flow	<ol style="list-style-type: none"> 1. The user attempts to access the eHealth WS Therapeutic Link 2. The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> 3. A request for a SAML Token is sent to the Secure Token Service (STS) 4. The STS responds with a SAML Token 5. The user has access to the eHealth WS Therapeutic Link 6. The user does a request for Revoke Therapeutic Link 7. The Revoke Therapeutic Link Request is sent to the WS Therapeutic Link 8. The WS Consent responds with a Revoke Therapeutic Link Response: error message
Postconditions	Error message
Test Data	<ul style="list-style-type: none"> • Example Revoke Therapeutic Link Request • Example Revoke Therapeutic Link Response • Example Revoke Therapeutic Link Response - Unsuccessful


	<div> <div>E n d p o i n t (s)</div> <div>Therapeutic Links Database</div> </div>
--	-------------------------------------------------------------------------------------------------------------------

Exception Flow 3

Flow	Specifications												
<div>  Unknown macro: 'drawio' </div>	<table> <tr> <td>ID</td><td>UC-249-EF03</td></tr> <tr> <td>Name</td><td>Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - No active therapeutic link of this type for the given HC party</td></tr> <tr> <td>Description</td><td> <p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. No active therapeutic link of this type for the given HC party</p> </td></tr> <tr> <td>Actor(s)</td><td> <ul style="list-style-type: none"> HC Professional within a pharmacy </td></tr> <tr> <td>Requirements</td><td> <ul style="list-style-type: none"> End-user is a HC professional within a pharmacy End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link Identification HC professional <p>°Identifier pharmacy: NIHII, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: referral Inclusive start date: optional Exclusive end date: optional Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode No active therapeutic link of this type for the given HC party </td></tr> <tr> <td>Trigger</td><td>The user wants to revoke a therapeutic link</td></tr> </table>	ID	UC-249-EF03	Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - No active therapeutic link of this type for the given HC party	Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. No active therapeutic link of this type for the given HC party</p>	Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy 	Requirements	<ul style="list-style-type: none"> End-user is a HC professional within a pharmacy End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link Identification HC professional <p>°Identifier pharmacy: NIHII, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: referral Inclusive start date: optional Exclusive end date: optional Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode No active therapeutic link of this type for the given HC party 	Trigger	The user wants to revoke a therapeutic link
ID	UC-249-EF03												
Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - No active therapeutic link of this type for the given HC party												
Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. No active therapeutic link of this type for the given HC party</p>												
Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy 												
Requirements	<ul style="list-style-type: none"> End-user is a HC professional within a pharmacy End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link Identification HC professional <p>°Identifier pharmacy: NIHII, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: referral Inclusive start date: optional Exclusive end date: optional Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode No active therapeutic link of this type for the given HC party 												
Trigger	The user wants to revoke a therapeutic link												

	Pr ec on di on (s)	<ul style="list-style-type: none"> The user has an account for the application The user is logged out
	Flow	<ol style="list-style-type: none"> The user attempts to access the eHealth WS Therapeutic Link The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> A request for a SAML Token is sent to the Secure Token Service (STS) The STS responds with a SAML Token The user has access to the eHealth WS Therapeutic Link The user does a request for Revoke Therapeutic Link The Revoke Therapeutic Link Request is sent to the WS Therapeutic Link The WS Consent responds with a Revoke Therapeutic Link Response: error message
	Pos t Co ndi tio n (s)	Error message
	Test Data	<ul style="list-style-type: none"> Example Revoke Therapeutic Link Request Example Revoke Therapeutic Link Response Example Revoke Therapeutic Link Response - Unsuccessful
	End point (s)	Therapeutic Links Database

Exception Flow 4

Flow	Specifications								
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-249-EF04</td></tr> <tr> <td>Name</td><td>Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral -Sender is not allowed to perform the revocation</td></tr> <tr> <td>Description</td><td> <p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. The sender is not allowed to perform the revocation according to the predefined rules e.g. validation on the author (NIHII valid, SSIN valid,...?)</p> </td></tr> <tr> <td>Actor(s)</td><td> <ul style="list-style-type: none"> HC Professional within a pharmacy </td></tr> </table>	ID	UC-249-EF04	Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - Sender is not allowed to perform the revocation	Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. The sender is not allowed to perform the revocation according to the predefined rules e.g. validation on the author (NIHII valid, SSIN valid,...?)</p>	Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy
ID	UC-249-EF04								
Name	Revoke Therapeutic Link - HC Professional within a pharmacy – e-ID - Referral - Sender is not allowed to perform the revocation								
Description	<p>Revoke Therapeutic Link is a service used to revoke a therapeutic link between a patient and a HC party.</p> <p>HC Professional within a pharmacy acts as author of the referral Therapeutic Link. The given proof is the e-ID reading with PIN code of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the pharmacy. The sender is not allowed to perform the revocation according to the predefined rules e.g. validation on the author (NIHII valid, SSIN valid,...?)</p>								
Actor(s)	<ul style="list-style-type: none"> HC Professional within a pharmacy 								

R e q u i r e m e n t s	<ul style="list-style-type: none"> • End-user is a HC professional within a pharmacy • End-user manages the therapeutic links throughout his usual software • Valid eHealth Certificate of the pharmacy • e-ID card of concerned patient • HC professional that performs the operations (end-user) is different from the healthcare professional concerned by the therapeutic link • Identification HC professional <p>°Identifier pharmacy: NIHL, HC party category</p> <p>°Identifier pharmacy holder: SSIN, NIHL (if available), HC party category</p> <ul style="list-style-type: none"> • Information therapeutic link <p>°Identification concerned patient: SSIN, support card number (optional), first and family name (optional)</p> <p>°Identification concerned HC party: NIHL (8digits), HC party category, name of the organization (optional)</p> <ul style="list-style-type: none"> • Type of therapeutic link: referral • Inclusive start date: optional • Exclusive end date: optional • Comment to justify the declaration (optional) • Type of proof: e-ID reading with pincode • The sender is not allowed to perform the revocation according to the predefined rules e.g. validation on the author (NIHL valid, SSIN valid,...?)
T r i g g e r	The user wants to revoke a therapeutic link
P r e c o n d i t i o n (s)	<ul style="list-style-type: none"> • The user has an account for the application • The user is logged out
F l o w	<ol style="list-style-type: none"> 1. The user attempts to access the eHealth WS Therapeutic Link 2. The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> 3. A request for a SAML Token is sent to the Secure Token Service (STS) 4. The STS responds with a SAML Token 5. The user has access to the eHealth WS Therapeutic Link 6. The user does a request for Revoke Therapeutic Link 7. The Revoke Therapeutic Link Request is sent to the WS Therapeutic Link 8. The WS Consent responds with a Revoke Therapeutic Link Response: error message
P o s t C o n d i t i o n (s)	Error message

T e s t D a t a	<ul style="list-style-type: none"> • Example Revoke Therapeutic Link Request • Example Revoke Therapeutic Link Response • Example Revoke Therapeutic Link Response - Unsuccessful
	E n d p o i n t (s) Therapeutic Links Database