


UC-240-Put TherLink - HC Prof pharmacy-e-ID reading with pincode

Used Documentation

Cookbook	Version	Location
Therapeutic Link WS Cookbook	1.6	https://www.ehealth.fgov.be/ehealthplatform/nl/service-ehealth-therapeutic-links

General Information

Therapeutic Links

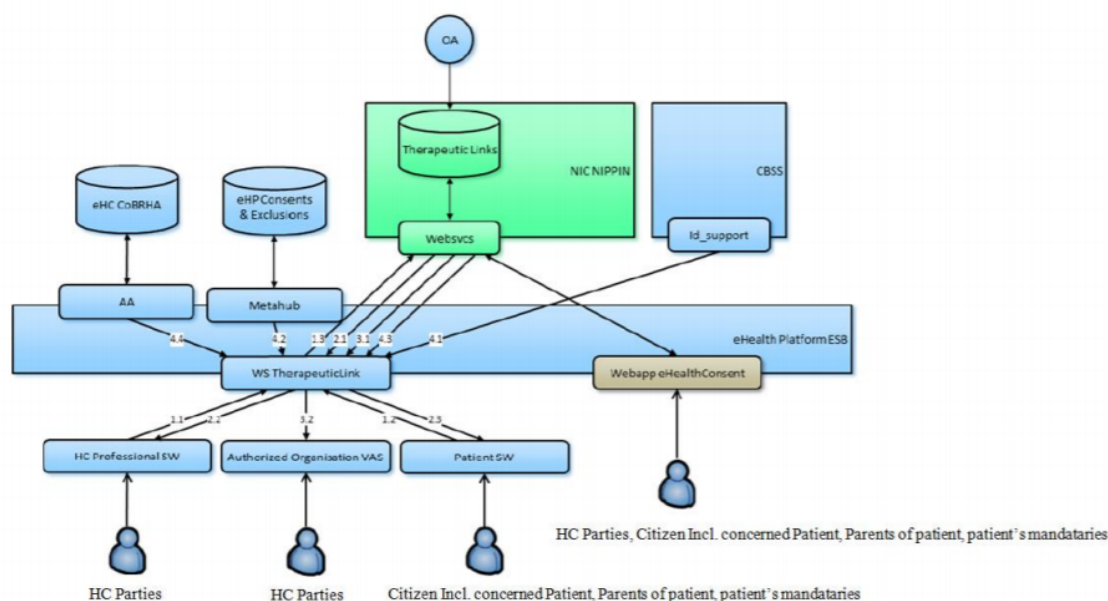

Management of the Therapeutic Links:

- The eHealth consent WA will allow both patients (incl. patient's parents or mandatories) and authorized HC parties to manage the therapeutic links (declaration, revocation and consultation)
- The authorized HC parties, citizen (incl. concerned patients, parents of patients or patient's mandatories) are also able to perform the same operations throughout their usual software by calling the eHealth therapeutic link WS.
- The authorized HC organizations are only authorized to verify the existence of the therapeutic links before allowing the HC parties to access the medical data of the patients by calling the therapeutic link consultation WS through their application.

The existence of a therapeutic relation is one of the fundamental prerequisites for the healthcare (HC) providers to access a patient's medical data. Therefore, the eHealth platform makes available to the actors involved in the exchange, storage or referencing personal data, a relay service to manage those therapeutic relations and associated means of evidence.

This relay service is obviously limited to kinds of therapeutic links made available at the eHealth platform level by the 'owner' of this therapeutic link (such as the HC party declaring a therapeutic link or the actor responsible of a recognized specific database, e.g. for Global Medical File relation). A therapeutic link is a relation between a patient and a HC party for a certain type of therapeutic relation over a period of validity depending on the given evidence. It is not possible to update an existing therapeutic link; to update information you first need to revoke the existing therapeutic link.

However, the period of validity of an active therapeutic link could be extended on the condition that

- The start date of the new period is greater or equal to the start date of the period to be extended
- The end date of the new period is greater than the end date of the period to be extended (overlap of period of validity)

The following operations (request-response operation type) will support the management of these links:

PutTherapeuticLink	Used to declare the therapeutic links. Its main purpose is to allow one to declare a therapeutic link.
RevokeTherapeuticLink	Used to revoke the therapeutic links. Its main purpose is to allow one to “end” the (declaration of a) therapeutic link.
GetTherapeuticLink	Used to consult therapeutic links according to basic search parameters. Its main purpose is to allow one to check the existence of the therapeutic links when executing a consultation process
HasTherapeuticLink	Used to check the existence of a therapeutic link

The therapeutic links are managed according to the rules corresponding to the type of therapeutic link through:

- Specific webservices (WS) by HC professionals as end-users through their usual software or through an authorized organization
- A dedicated web application (WA), currently called eHealth Consent with following end-users: Patients and HC professionals/ HC professionals within an organization

	Declare/Put	Revoke	Consult (Get)	Has
Citizen (patient, parent, mandatory)	Yes	Yes	Yes	Yes
Authorized HC Parties (HC professionals)	Yes	Yes	Yes	Yes
Authorized HC organizations	No	No	Yes	Yes

KMEHR


This service is a 'KMEHR-based' WS. We thus strongly recommend consulting the documentation related to the KMEHR normative elements. The KMEHR site aims to offer a central point for the documentation of the KMEHR normative elements.

<https://www.ehealth.fgov.be/standards/kmehr/en>

The three following generic elements are, in particular, essentials to build the request and the reply of the therapeutic link WS.

- **cd** : This is the key element used to code information: this section is completely based on the description from the KMEHR standard, as can be found on: <https://www.ehealth.fgov.be/standards/kmehr/en/page/key-elements#cd>
- **id**: This element is used to uniquely identify key elements like request, response of the WS, patient, HCParty. It can also be used to specify any unique identifier: this section is completely based on the description from the KMEHR standard, as can be found on: <https://www.ehealth.fgov.be/standards/kmehr/en/page/key-elements#id>
- **HC Party**: The hcparty element is a generic element that aims to represent any kind of healthcare party: organization, physician, medical specialty, or even IT systems: this section is entirely based on the description from the KMEHR standard, as can be found on: <https://www.ehealth.fgov.be/standards/kmehr/en/page/hcparty>


Basic Flow

Flow	Specifications				
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-240-BF</td></tr> <tr> <td>Name</td><td>Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode</td></tr> </table>	ID	UC-240-BF	Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode
ID	UC-240-BF				
Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode				

Desc ription	<p>Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party.</p> <p>HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization).</p>
Actor (s)	HC Professional in a pharmacy who is the pharmacy holder
Requ irem ents	<ul style="list-style-type: none"> • End-user is a HC professional in a pharmacy who is the pharmacy holder • End-user manages the therapeutic links throughout his usual software • Valid personal eHealth Certificate • ISI+ card of concerned patient • Identification HC professional <p>°Identifier Pharmacy: NIHII, HC category</p> <p>°Identifier Pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> • Information therapeutic link <p>°Identification concerned patient: SSIN, ISI+ card, patient first and family name</p> <p>°Identification concerned HC party: NIHII, HC party category, organization name (optional)</p> <ul style="list-style-type: none"> • Type of therapeutic link: pharmacydelivery • Period of validity: 15 months • Inclusive start date (optional) • Exclusive end date (optional) • Comment to justify the declaration (optional) • Type of proof: e-ID reading with pincode
Trigg er	The user wants to put a therapeutic link
Prec onditi on(s)	<ul style="list-style-type: none"> • The user has an account for the application • The user is logged out
Flow	<ol style="list-style-type: none"> 1. The user attempts to access the eHealth WS Therapeutic Link 2. The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> 3. A request for a SAML Token is sent to the Secure Token Service (STS) 4. The STS responds with a SAML Token 5. The user has access to the eHealth WS Therapeutic Link 6. The user does a request for Put Therapeutic Link 7. The Put Therapeutic Link Request is sent to the WS Therapeutic Link 8. The Therapeutic link is created in eHealth Database 9. The request is logged 10. The WS Consent responds with a Therapeutic Link Response
Post Cond ition (s)	<ul style="list-style-type: none"> • Request is logged • The Therapeutic Link is created in eHealth Database
Test Data	<ul style="list-style-type: none"> • Example Pharmacy • Example Put Therapeutic Link Request • Example Put Therapeutic Link Response • Example Put Therapeutic Link Response - Unsuccessful
End point (s)	Therapeutic Link Database


Remarks	<ul style="list-style-type: none"> Start date must be equal to the declaration date i.e. the date when the declaration request is processed (the current date) else the request is rejected) The end-date must be greater than the SD
Additional Information	For the overlapped relations, the start date of the new period must be greater or equal to the start date of the period to be extended and the end-date of the new period must be greater than the end-date of the period to be extended

Alternative Flow

Flow	Specifications														
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-240-AF</td></tr> <tr> <td>Name</td><td>Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - not pharmacy holder</td></tr> <tr> <td>Description</td><td> <p>Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party.</p> <p>HC professional within a pharmacy who isn't the pharmacy holder acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization).</p> </td></tr> <tr> <td>Actor(s)</td><td>HC Professional in a pharmacy who is the pharmacy holder</td></tr> <tr> <td>Requirements</td><td> <ul style="list-style-type: none"> End-user is a HC professional in a pharmacy who is the pharmacy holder End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient Identification HC professional <p>°Identifier pharmacy: NIHII, HC professional category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <p>°Identifier end-user: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, e-ID card, first and family name</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, organization name (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: pharmacydelivery Period of validity: 15 months Inclusive start date (optional) Exclusive end date (optional) Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode </td></tr> <tr> <td>Trigger</td><td>The user wants to put a therapeutic link</td></tr> <tr> <td>Precondition(s)</td><td> <ul style="list-style-type: none"> The user has an account for the application The user is logged out </td></tr> </table>	ID	UC-240-AF	Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - not pharmacy holder	Description	<p>Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party.</p> <p>HC professional within a pharmacy who isn't the pharmacy holder acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization).</p>	Actor(s)	HC Professional in a pharmacy who is the pharmacy holder	Requirements	<ul style="list-style-type: none"> End-user is a HC professional in a pharmacy who is the pharmacy holder End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient Identification HC professional <p>°Identifier pharmacy: NIHII, HC professional category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <p>°Identifier end-user: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, e-ID card, first and family name</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, organization name (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: pharmacydelivery Period of validity: 15 months Inclusive start date (optional) Exclusive end date (optional) Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode 	Trigger	The user wants to put a therapeutic link	Precondition(s)	<ul style="list-style-type: none"> The user has an account for the application The user is logged out
ID	UC-240-AF														
Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - not pharmacy holder														
Description	<p>Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party.</p> <p>HC professional within a pharmacy who isn't the pharmacy holder acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization).</p>														
Actor(s)	HC Professional in a pharmacy who is the pharmacy holder														
Requirements	<ul style="list-style-type: none"> End-user is a HC professional in a pharmacy who is the pharmacy holder End-user manages the therapeutic links throughout his usual software Valid eHealth Certificate of the pharmacy e-ID card of concerned patient Identification HC professional <p>°Identifier pharmacy: NIHII, HC professional category</p> <p>°Identifier pharmacy holder: SSIN, NIHII (if available), HC party category</p> <p>°Identifier end-user: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, e-ID card, first and family name</p> <p>°Identification concerned HC party: NIHII (8digits), HC party category, organization name (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: pharmacydelivery Period of validity: 15 months Inclusive start date (optional) Exclusive end date (optional) Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode 														
Trigger	The user wants to put a therapeutic link														
Precondition(s)	<ul style="list-style-type: none"> The user has an account for the application The user is logged out 														

Flow	<ol style="list-style-type: none"> 1. The user attempts to access the eHealth WS Therapeutic Link 2. The user needs to request a SAML Token by using its <i>personal eHealth Certificate</i> 3. A request for a SAML Token is sent to the Secure Token Service (STS) 4. The STS responds with a SAML Token 5. The user has access to the eHealth WS Therapeutic Link 6. The user does a request for Put Therapeutic Link 7. The Put Therapeutic Link Request is sent to the WS Therapeutic Link 8. The Therapeutic link is created in eHealth Database 9. The request is logged 10. The WS Consent responds with a Therapeutic Link Response
Post Condition(s)	<ul style="list-style-type: none"> • Request is logged • The Therapeutic Link is created in eHealth Database
Test Data	<ul style="list-style-type: none"> • Example Pharmacy • Example Put Therapeutic Link Request • Example Put Therapeutic Link Response • Example Put Therapeutic Link Response - Unsuccessful
Endpoint(s)	Therapeutic Link Database
Remarks	<ul style="list-style-type: none"> • Start date must be equal to the declaration date i.e. the date when the declaration request is processed (the current date) else the request is rejected) • The end-date must be greater than the SD
Additional Information	For the overlapped relations, the start date of the new period must be greater or equal to the start date of the period to be extended and the end-date of the new period must be greater than the end-date of the period to be extended


Exception Flow 1

Flow	Specifications								
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-240-EF01</td></tr> <tr> <td>Name</td><td>Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - HC party performing the declaration does not belong to the same HC party category as the HC party concerned by the therapeutic link</td></tr> <tr> <td>Description</td><td>Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). HC party performing the declaration does not belong to the same HC party category as the HC party concerned by the therapeutic link</td></tr> <tr> <td>Actor(s)</td><td>HC Professional in a pharmacy who is the pharmacy holder</td></tr> </table>	ID	UC-240-EF01	Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - HC party performing the declaration does not belong to the same HC party category as the HC party concerned by the therapeutic link	Description	Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). HC party performing the declaration does not belong to the same HC party category as the HC party concerned by the therapeutic link	Actor(s)	HC Professional in a pharmacy who is the pharmacy holder
ID	UC-240-EF01								
Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - HC party performing the declaration does not belong to the same HC party category as the HC party concerned by the therapeutic link								
Description	Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). HC party performing the declaration does not belong to the same HC party category as the HC party concerned by the therapeutic link								
Actor(s)	HC Professional in a pharmacy who is the pharmacy holder								

R e q u i r e m e n t s	<ul style="list-style-type: none"> • End-user is a HC professional in a pharmacy who is the pharmacy holder • End-user manages the therapeutic links throughout his usual software • Valid personal eHealth Certificate • ISI+ card of concerned patient • Identification HC professional <p>°Identifier Pharmacy: NIHII, HC category</p> <p>°Identifier Pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> • Information therapeutic link <p>°Identification concerned patient: SSIN, ISI+ card, patient first and family name</p> <p>°Identification concerned HC party: NIHII, HC party category, organization name (optional)</p> <ul style="list-style-type: none"> • Type of therapeutic link: pharmacydelivery • Period of validity: 15 months • Inclusive start date (optional) • Exclusive end date (optional) • Comment to justify the declaration (optional) • Type of proof: e-ID reading with pincode • HC party performing the declaration does not belong to the same HC party category as the HC party concerned by the therapeutic link
T r i g g e r	The user wants to put a therapeutic link
P r e c o n d i t i o n (s)	<ul style="list-style-type: none"> • The user has an account for the application • The user is logged out
F l o w	<ol style="list-style-type: none"> 1. The user attempts to access the eHealth WS Therapeutic Link 2. The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> 3. A request for a SAML Token is sent to the Secure Token Service (STS) 4. The STS responds with a SAML Token 5. The user has access to the eHealth WS Therapeutic Link 6. The user does a request for Put Therapeutic Link 7. The Put Therapeutic Link Request is sent to the WS Therapeutic Link 8. The WS Consent responds with a Therapeutic Link Response: error message
P o s t c o n d i t i o n (s)	Error message
T e s t D a t a	<ul style="list-style-type: none"> • Example Put Therapeutic Link Request • Example Put Therapeutic Link Response • Example Put Therapeutic Link Response - Unsuccessful


E n d p o i n t (s)	Therapeutic Link Database
---	---------------------------

Exception Flow 2

Flow	Specifications												
 Unknown macro: 'drawio'	<table border="1"> <tr> <td>ID</td><td>UC-240-EF02</td></tr> <tr> <td>Name</td><td>Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - A valid therapeutic link of the same type and for the same HC party already exists</td></tr> <tr> <td>Description</td><td>Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). A valid therapeutic link of the same type and for the same HC party already exists</td></tr> <tr> <td>Actor(s)</td><td>HC Professional in a pharmacy who is the pharmacy holder</td></tr> <tr> <td>Requirements</td><td> <ul style="list-style-type: none"> End-user is a HC professional in a pharmacy who is the pharmacy holder End-user manages the therapeutic links throughout his usual software Valid personal eHealth Certificate ISI+ card of concerned patient Identification HC professional <p>°Identifier Pharmacy: NIHII, HC category</p> <p>°Identifier Pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, ISI+ card, patient first and family name</p> <p>°Identification concerned HC party: NIHII, HC party category, organization name (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: pharmacydelivery Period of validity: 15 months Inclusive start date (optional) Exclusive end date (optional) Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode A valid therapeutic link of the same type and for the same HC party already exists </td></tr> <tr> <td>Trigger</td><td>The user wants to put a therapeutic link</td></tr> </table>	ID	UC-240-EF02	Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - A valid therapeutic link of the same type and for the same HC party already exists	Description	Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). A valid therapeutic link of the same type and for the same HC party already exists	Actor(s)	HC Professional in a pharmacy who is the pharmacy holder	Requirements	<ul style="list-style-type: none"> End-user is a HC professional in a pharmacy who is the pharmacy holder End-user manages the therapeutic links throughout his usual software Valid personal eHealth Certificate ISI+ card of concerned patient Identification HC professional <p>°Identifier Pharmacy: NIHII, HC category</p> <p>°Identifier Pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, ISI+ card, patient first and family name</p> <p>°Identification concerned HC party: NIHII, HC party category, organization name (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: pharmacydelivery Period of validity: 15 months Inclusive start date (optional) Exclusive end date (optional) Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode A valid therapeutic link of the same type and for the same HC party already exists 	Trigger	The user wants to put a therapeutic link
ID	UC-240-EF02												
Name	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - A valid therapeutic link of the same type and for the same HC party already exists												
Description	Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). A valid therapeutic link of the same type and for the same HC party already exists												
Actor(s)	HC Professional in a pharmacy who is the pharmacy holder												
Requirements	<ul style="list-style-type: none"> End-user is a HC professional in a pharmacy who is the pharmacy holder End-user manages the therapeutic links throughout his usual software Valid personal eHealth Certificate ISI+ card of concerned patient Identification HC professional <p>°Identifier Pharmacy: NIHII, HC category</p> <p>°Identifier Pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> Information therapeutic link <p>°Identification concerned patient: SSIN, ISI+ card, patient first and family name</p> <p>°Identification concerned HC party: NIHII, HC party category, organization name (optional)</p> <ul style="list-style-type: none"> Type of therapeutic link: pharmacydelivery Period of validity: 15 months Inclusive start date (optional) Exclusive end date (optional) Comment to justify the declaration (optional) Type of proof: e-ID reading with pincode A valid therapeutic link of the same type and for the same HC party already exists 												
Trigger	The user wants to put a therapeutic link												

Pr ec on dit io n (s)	<ul style="list-style-type: none"> The user has an account for the application The user is logged out
Fl ow	<ol style="list-style-type: none"> The user attempts to access the eHealth WS Therapeutic Link The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> A request for a SAML Token is sent to the Secure Token Service (STS) The STS responds with a SAML Token The user has access to the eHealth WS Therapeutic Link The user does a request for Put Therapeutic Link The Put Therapeutic Link Request is sent to the WS Therapeutic Link The WS Consent responds with a Therapeutic Link Response: error message
P os t C on dit io n (s)	Error message
Te st D ata	<ul style="list-style-type: none"> Example Put Therapeutic Link Request Example Put Therapeutic Link Response Example Put Therapeutic Link Response - Unsuccessful
E nd po int (s)	Therapeutic Link Database

Exception Flow 3

Flow	Specifications								
 Unknown macro: 'drawio'	<table> <tr> <td>ID</td><td>UC-240-EF03</td></tr> <tr> <td>N a me</td><td>Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - Sender not allowed to perform the declaration</td></tr> <tr> <td>D e s cr ip ti on</td><td>Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). The sender is not allowed to perform the declaration according to the predefined rules e.g. validation on the author (NIHII valid, SSIN valid,...?)</td></tr> <tr> <td>A ct o r (s)</td><td>HC Professional in a pharmacy who is the pharmacy holder</td></tr> </table>	ID	UC-240-EF03	N a me	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - Sender not allowed to perform the declaration	D e s cr ip ti on	Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). The sender is not allowed to perform the declaration according to the predefined rules e.g. validation on the author (NIHII valid, SSIN valid,...?)	A ct o r (s)	HC Professional in a pharmacy who is the pharmacy holder
ID	UC-240-EF03								
N a me	Put Therapeutic Link - HC Professional within a pharmacy - e-ID reading with pincode - Sender not allowed to perform the declaration								
D e s cr ip ti on	Put Therapeutic Link, service used to declare a therapeutic link between a patient and a HC party. HC professional within a pharmacy acts as author of the Put Therapeutic Link. The given proof is the e-ID reading with pincode of the patient. Certificate used to access the WS Therapeutic Link is the eHealth Certificate of the end-user (HC Organization). The sender is not allowed to perform the declaration according to the predefined rules e.g. validation on the author (NIHII valid, SSIN valid,...?)								
A ct o r (s)	HC Professional in a pharmacy who is the pharmacy holder								

R e q u i r e m e n t s	<ul style="list-style-type: none"> • End-user is a HC professional in a pharmacy who is the pharmacy holder • End-user manages the therapeutic links throughout his usual software • Valid personal eHealth Certificate • ISI+ card of concerned patient • Identification HC professional <p>°Identifier Pharmacy: NIHII, HC category</p> <p>°Identifier Pharmacy holder: SSIN, NIHII (if available), HC party category</p> <ul style="list-style-type: none"> • Information therapeutic link <p>°Identification concerned patient: SSIN, ISI+ card, patient first and family name</p> <p>°Identification concerned HC party: NIHII, HC party category, organization name (optional)</p> <ul style="list-style-type: none"> • Type of therapeutic link: pharmacydelivery • Period of validity: 15 months • Inclusive start date (optional) • Exclusive end date (optional) • Comment to justify the declaration (optional) • Type of proof: e-ID reading with pincode • The sender is not allowed to perform the declaration according to the predefined rules e.g. validation on the author (NIHII valid, SSIN valid,...?)
T r i g g e r	The user wants to put a therapeutic link
P r e c o n d i t i o n (s)	<ul style="list-style-type: none"> • The user has an account for the application • The user is logged out
F l o w	<ol style="list-style-type: none"> 1. The user attempts to access the eHealth WS Therapeutic Link 2. The user needs to request a SAML Token by using it's <i>personal eHealth Certificate</i> 3. A request for a SAML Token is sent to the Secure Token Service (STS) 4. The STS responds with a SAML Token 5. The user has access to the eHealth WS Therapeutic Link 6. The user does a request for Put Therapeutic Link 7. The Put Therapeutic Link Request is sent to the WS Therapeutic Link 8. The WS Consent responds with a Therapeutic Link Response: error message
P o s t C o n d i t i o n (s)	Error message

T e st D ata	<ul style="list-style-type: none"> • Example Put Therapeutic Link Request • Example Put Therapeutic Link Response • Example Put Therapeutic Link Response - Unsuccessful
	E n d p oi nt (sà Therapeutic Link Database